



MP V2 SERIES

Outdoor Fixed Fine Pitch
Energy-saving LED Display



Various Size
& Corner Panel



3rd Generation
Energy-saving technology



High Stability
& Reliability



High Weather
Resistance



True Color



Save Money

Applications



Billboard



Spectacular



Street Furniture



Digital Sign



Transit Center




Sports



3rd Generation Energy-saving Technology

- Precision RGB voltage control;
- More than 20% cooler temperatures;
- More than 20% lower power consumption;
- Better color and brightness uniformity;
- Longer LED lifespan.

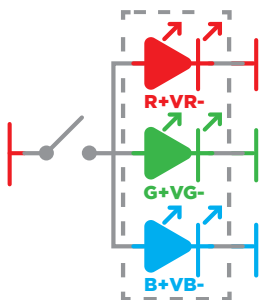


High Stability & Reliability

- ventilating valve device design
- Modules safe-lock design
($\leq P2.9$ safe-lock & magnetic design,
 $> P2.9$ safe-lock design)
- Modules independent waterproof design



Any Size You Need

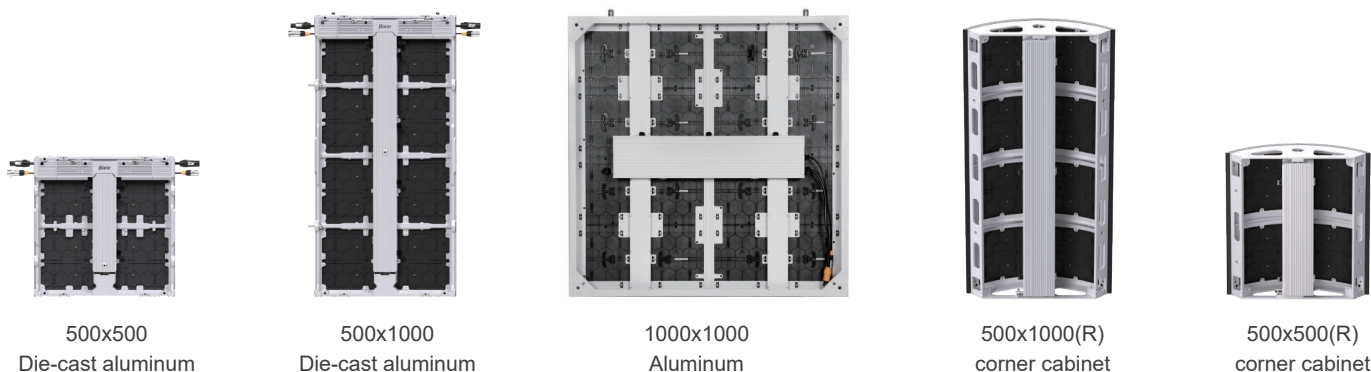

True Color, Stunning Visuals

Up to 10,000 nits


High brightness

≥ 16 bit

High gray scale

110% NTSC

Wide color gamut

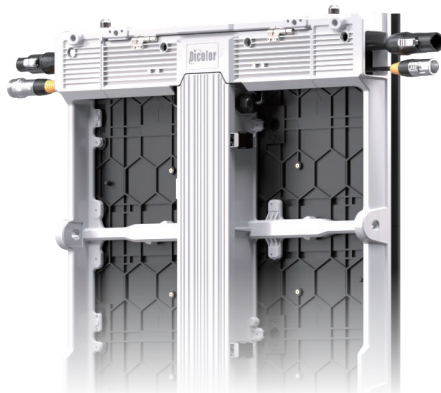

7680 Hz

High refresh rate

≥ 5,000 : 1

High contrast ratio

PWM IC + Nova AxS

Colormanager

Lower Operating Costs, Higher ROI



Savings in electricity costs



Light weight design,
saving steel structure cost



Thin cabinet, convenient transport,
save transport cost



Convenient maintenance-front
and rear access

Product	MP-260V2	MP-290V2	MP-390V2	MP-480V2	MP-590V2	MP-780V2	MP-100V2
Pixel pitch (mm)	2.6	2.9	3.9	4.8	5.9	7.8	10
LED	SMD1515	SMD1515	SMD1820	SMD1820	SMD2727	SMD2727	SMD2727
Scan rate	1/24	1/21	1/11	1/8	1/6	1/4	1/2
Cabinet material	Die-casting aluminum						
Brightness (nits)	4000	4500	5000	5000	5000	7000	10000
Cabinet dimensions	500x500	500x500, 500x750, 500x1000			500x500, 500x750, 500x1000,1000x1000		
Refresh rate (Hz)	7680						
Grayscale (bit)	16						
Ingress protection	IP65						
Maintenance	Front and rear						
Certificate	CE,FCC,ETL						



Shenzhen Dicolor Group Co., Ltd.

Add: No.13 Huiye Road, Tangjia Community, Fenghuang Street, Guangming District, Shenzhen, China.

Tel: +86-755-3369 1736

E-mail: inquiry@dicolorled.com

Web: www.dicolorled.com

202404